



Model	PL150W50KCXXYYZ3	PL240W50KCXXYYZ3	PL300W50KCXXYYZ3
Lumen	21 000	33 600	42 000
CCT	5000K		
CRI	>80		
Light Source	Lumileds		
Wattage	150W	240W	300W
Dimension (mm)	428x304x88mm	595x304x92mm	595x304x92mm
Voltage	120-277V ; 200-480V		
Driver	Meanwell, SOSEN		
Operating Temp	-30°C to 50°C		
IP Rating	IP66		
Dimming	1-10V		
Life Span	L70, 120 000 Hours		
Certification	UL, CE, SAA, DLC		

PC Lens is Easy to Replace




Modular design, large, medium and small size, uniform PC lens, easy to replace.

Pole Mount

This pole mount was designed to complement the fixture's aerodynamic shape. By future reducing the fixture's drag, this product is suitable for harsher environments.



Brackets:

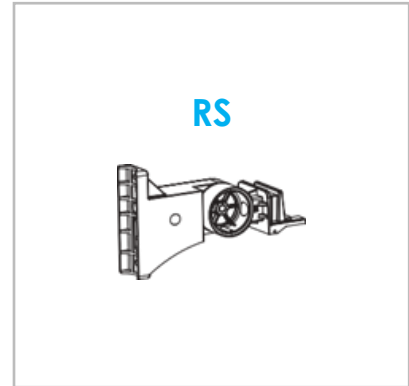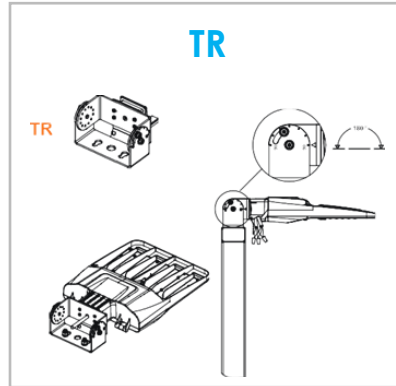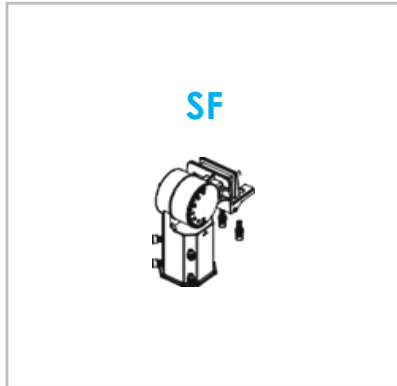

Photometric Diagrams

